

## PRODUCT SPECIFICATIONS

# ILDV40 REVEAL Direct Vent Insert System



### GLASS VIEWING AREA

37-1/2" W x 23-3/8" H x 18-3/8" D (512 sq.in)

### TECHNICAL INFORMATION

Max. Btu Input: 38,000 BTU/HR

EnerGuide Ratings Fireplace Efficiency: 70.8% NG/ 79.8% LP

Afue Efficiency: 65.9% NG / 68.5% LP

Thermal Efficiency: UP TO 89.6%

CSA Design Certified

### FIELD INSTALLED ACCESSORIES

Surrounds: Colonial and Bevelled surrounds offered in Iron Age & Black Texture (Colonial surround features cast iron 4-3/4" mantel shelf)

Natural Flame™ burner with fiber ceramic log set


Cottage Clay firebrick

Thermostat blower (160 cfm) standard

3" intake, 3" exhaust vent pipe connectors for chimney flex liners

18" flex line with On/Off shut-off valve

Valve located on outside of firebox for easy access and maintenance

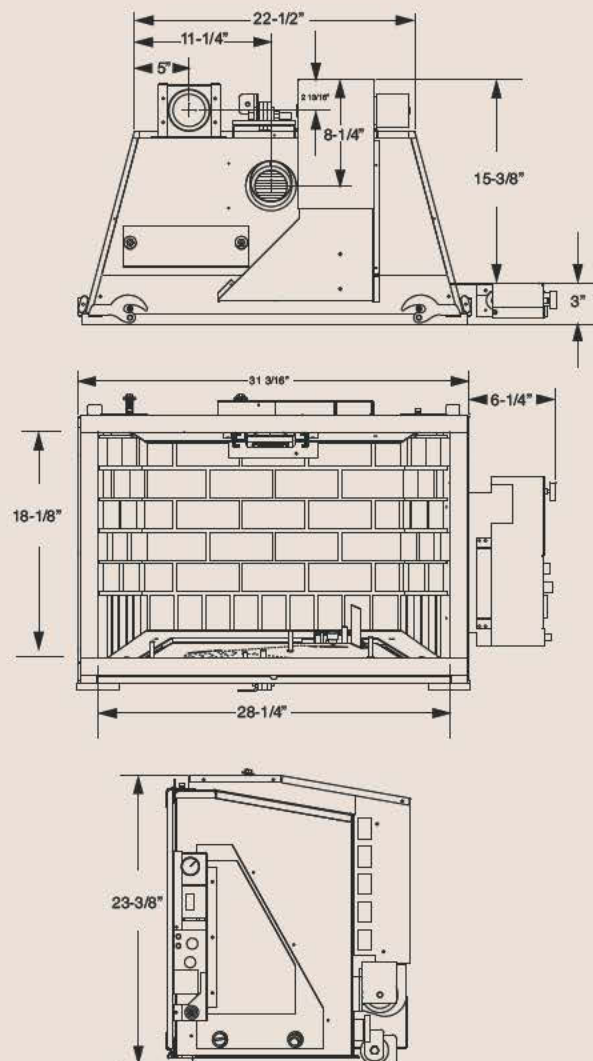

A Brand of Monessen Hearth Systems Co.  
149 Cleveland Drive, Paris, Kentucky 40361

[www.monessenhearth.com](http://www.monessenhearth.com)



To avoid personal injury or property damage, the product described by this brochure must be installed, operated and maintained in strict compliance with the instructions packaged with the product and all applicable building or fire codes. Contact local building or fire officials about restrictions and installation inspection requirements. All photographs and drawings on this brochure are for illustrative purposes only and are not intended for, nor should they be used as a substitute for the instructions packaged with the unit. Appearance and specifications of the product are subject to change without notice. © 2009 Monessen Hearth Systems Co.