


5.0 FINISHING

EN

! WARNING**RISK OF FIRE!****NEVER OBSTRUCT THE FRONT OPENING OF THE APPLIANCE.****DO NOT STRIKE, SLAM OR SCRATCH GLASS. DO NOT OPERATE APPLIANCE WITH GLASS REMOVED, CRACKED, BROKEN OR SCRATCHED.**

72.4

5.1 HOUSING PANEL INSTALLATION

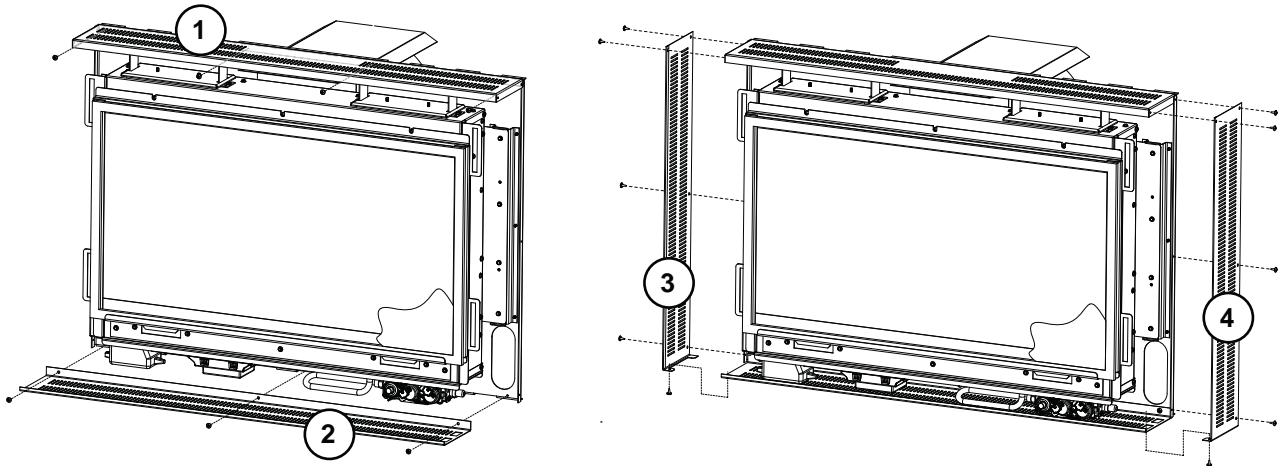

- A.** Secure the housing panels as illustrated using the 17 #8 X 3/8" screws supplied.
- 4 screws secure the top housing panel.
 - 3 screws secure the bottom housing panel.
 - 5 screws secure each of the side housing panels.

5.2 DOOR REMOVAL / INSTALLATION

! WARNING**GLASS MAY BE HOT, DO NOT TOUCH GLASS UNTIL COOLED.****THE DOOR LATCHES ARE PART OF A SAFETY SYSTEM AND MUST BE PROPERLY ENGAGED. DO NOT OPERATE THE APPLIANCE WITH LATCHES DISENGAGED.****FACING AND/OR FINISHING MATERIALS MUST NOT INTERFERE WITH AIR FLOW THROUGH AIR OPENINGS, LOUVRES OPENINGS, OPERATION OF LOUVRES OR DOORS OR ACCESS FOR SERVICE. OBSERVE ALL CLEARANCES WHEN APPLYING COMBUSTIBLE MATERIALS.****BEFORE DOOR IS REMOVED TURN THE APPLIANCE OFF AND WAIT UNTIL APPLIANCE IS COOL TO THE TOUCH. DOORS ARE HEAVY AND FRAGILE SO HANDLE WITH CARE.**

75.1

- A.** Remove the surround. (see "SURROUND INSTALLATION/REMOVAL" section) then remove the safety screen, (see, "SAFETY SCREEN INSTALLATION/REMOVAL" section).
- B.** Remove the 3 screws that secure the door.
- C.** Lift the door up and off.
- D.** Reverse steps to reinstall the door, safety screen and surround.

NOTE: A barrier designed to reduce the risk of burns from the hot viewing glass is provided with the appliance and must be installed.

