

PRODUCT SPECIFICATIONS

BDVSC(7)600 Direct Vent



GLASS VIEWING AREA

39"W x 20-3/8"H (795 Square Inches)

TECHNICAL INFORMATION

Max. Btu Input: 26,000 BTU/HR

Ignition System: Signature Command™ System

Gas Type: Natural or LP

Flue Type: MHSC T-Lock Pipe

Termination: Rear/Top Vent Convertible

Clearance to Flue for Interior: 3" Top, 1" Bottom and Sides**

Clearance to Flue for Outside Wall: 1"

Clearance to Fireplace: 1/2"

CSA Design Certified

FIELD INSTALLED ACCESSORIES

Louvers: Polished Brass, Pewter

Curved Trim: Brass, Pewter, Black

Medium Trim Kit: Brass, Pewter, Black

Control Variable Thermostat Controlled Forced Air Blower
(160 cfm) - BLOT

Signature Command Forced Air Blower (160 cfm) - BLOTSC

Control Fan and Cord: FK12

FK12 Speed Control: SCVS

Cottage Clay firebrick


Cottage Red firebrick

Mesh Glass Cover

Ambient Technologies™ Remote Controls and Thermostats

Designer Facings

** If vertical rise is 7-1/2 feet or higher when in top vent configuration only, the vent clearance to combustibles is 1" on all sides of the horizontal run.

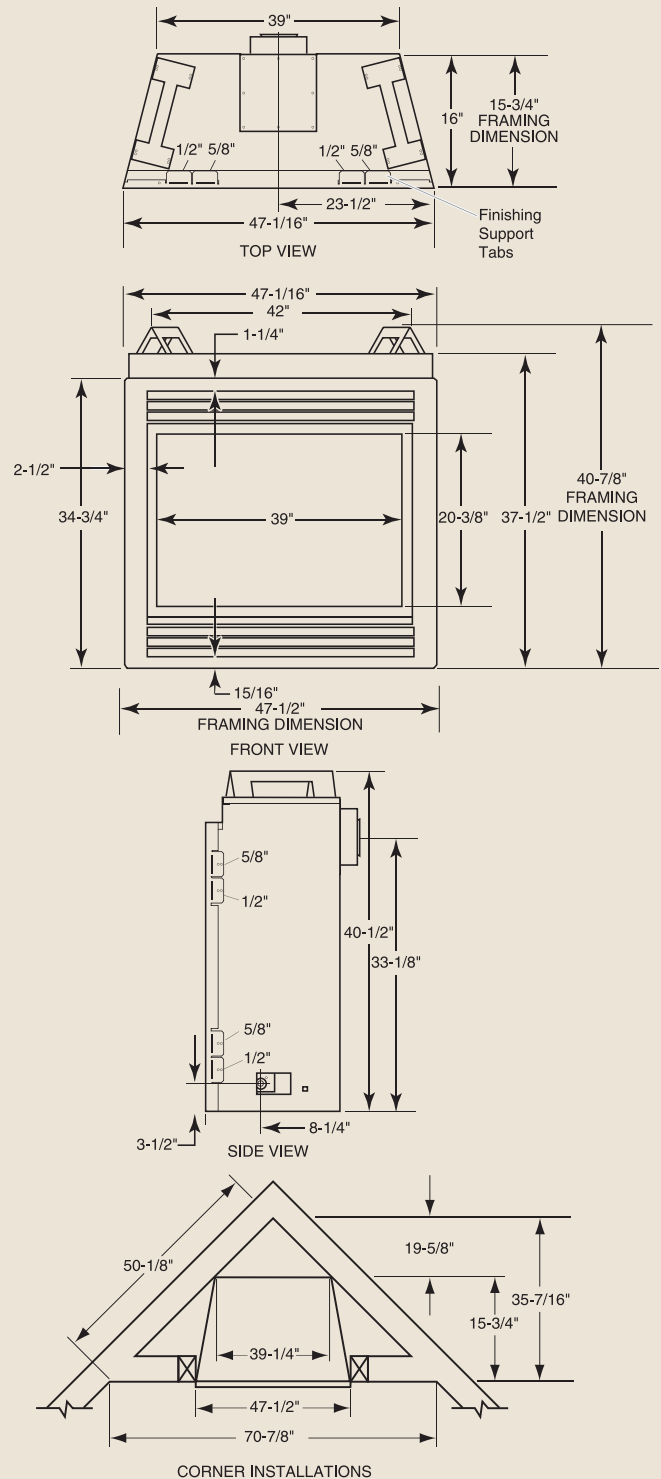

A Brand of Monessen Hearth Systems Co.
149 Cleveland Drive, Paris, Kentucky 40361

www.monessenhearth.com



To avoid personal injury or property damage, the product described by this brochure must be installed, operated and maintained in strict compliance with the instructions packaged with the product and all applicable building or fire codes. Contact local building or fire officials about restrictions and installation inspection requirements. All photographs and drawings on this brochure are for illustrative purposes only and are not intended for, nor should they be used as a substitute for the instructions packaged with the unit. Appearance and specifications of the product are subject to change without notice. © 2010 Monessen Hearth Systems Co. 04/10